


AIKE


Automatic Soap Dispenser
AK1333



Importer
Zhejiang Aike Appliances Co., Ltd.


Manufacturer
Zhejiang Aike Appliances Co., Ltd.
Yong'an Industry Zone, Xianju, Taizhou City, 317306 Zhejiang, China

Product introduction

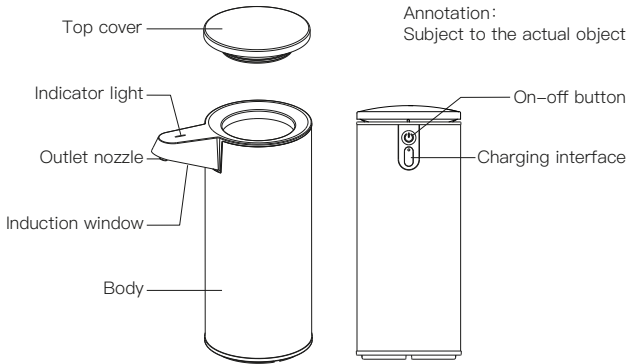

www.zjaike.com
E-mail : sales@zjaike.com

Specification

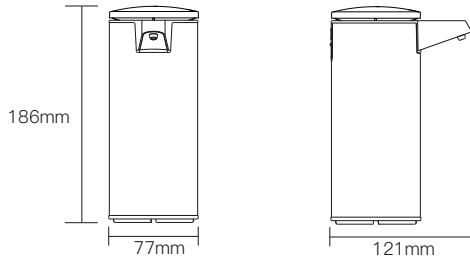

Model	AK1333	Power Supply	DC3.7V (Lithium battery,using Type-C charging interface)
Volume	280ml	Sensing Distance	3-7cm
Dimension	121×77×186mm	Liquid Supply	1.0-3.0ml
Net Weight	0.48kg	Waterproof	IPX4


How to use

1. Open the upper cover, pour in the soap, if there is overflow, please wipe it clean.
2. Long press the on-off button on the back of the machine for more than two seconds, the indicator light will turn white ,which means the machine come into operation. Long press the on-off button to switch between on and off, and the indicator light will turn orange when machine is turned off.
3. Put your hand under the sensor. When the sensor receives the signal, the LED indicator will light up and the soap will flow automatically.
4. It must be repeatedly sensed for many times until the soap flows out normally at the first time of using.
5. When the battery voltage is lower than 3.3V, the indicator light will flash orange to remind charging as soon as possible. The conventional 5V charging plug needs to be provided by yourself.



Warning

Minors please use this product with a guardian to prevent eating soap by mistake!
This machine contains microcomputer and other precision electronic circuits. It is strictly forbidden to shower!



Packing list

Machine X 1	Type-C X 1	Product Certificate X 1	User Manual X 1
-------------	------------	-------------------------	-----------------

1. Before first installation, if there is any discrepancy with the packing list, please contact the local dealer or manufacturer in time.
2. The specifications of some accessories are subject to change without prior notice. For problems that cannot be solved during installation, please contact the dealer or manufacturer in time.
3. The main parts are packed in special bags. Please don't collide and rub excessively during handling and unpacking to avoid damage.

Liquid adjustment

Long press the on-off button for more than 2 seconds, the machine turns on when light flash white and the liquid output of the machine is set by default.

The factory default liquid output is about 1.0ml (the liquid output is measured with water as the liquid). After pressing the on-off button once, the liquid output changes to about 2.0ml (the indicator light flashes twice). After pressing the button again, the liquid output changes to about 3.0ml (the indicator light flashes three times). Pressing the button three times again changes to the factory default setting. This cycle repeats.

